

ACC ES HD Recorder

Avigilon[™] Control Center (ACC) is designed to be the industry's easiest-to-use video management software, and has helped revolutionize how security professionals manage and interact with high definition video. As a distributed network platform with enterprise-class reliability, Avigilon Control Center is able to efficiently capture, manage and store high definition surveillance video while intelligently managing bandwidth and storage.

The ACC Edge Solution (ES) HD Recorder is an innovative addition to the ACC solution, enabling you to intelligently record locally, monitor centrally and manage remotely.




The ACC ES HD Recorder is equipped with ACC and features four Power over Ethernet (PoE) network ports that support Avigilon's full range of high definition cameras from 1 megapixel (MP) to 7K (30 MP) resolution. It is available in 2 terabyte (TB) and 4 TB storage models. Multiple appliances can be combined as a single logical site to support larger installations.

By offering intelligent monitoring deployed at the network edge, the ability to store high amounts of HD video data remotely, and the ability to view live or recorded video from long distances upon demand, the ACC ES HD Recorder is ideal for centralized monitoring of critical infrastructure locations such as upstream oil and gas pipelines, power substations, telecommunications towers and important city areas.

KEY FEATURES

Configured with Avigilon [™] Control Center High Definition Network Video Management
Uses Avigilon's industry leading High Definition Stream Management (HDSM) [™] technology
Network Video Recorder plus integrated switch with high powered PoE output
Records up to 80 Mbps of image data
Up to 30 images per second per camera channel
Supports HD cameras with self-learning analytics
Supports up to 7K (30 MP) camera resolution
Web based management interface that facilitates remote firmware upgrades

Outline Dimensions

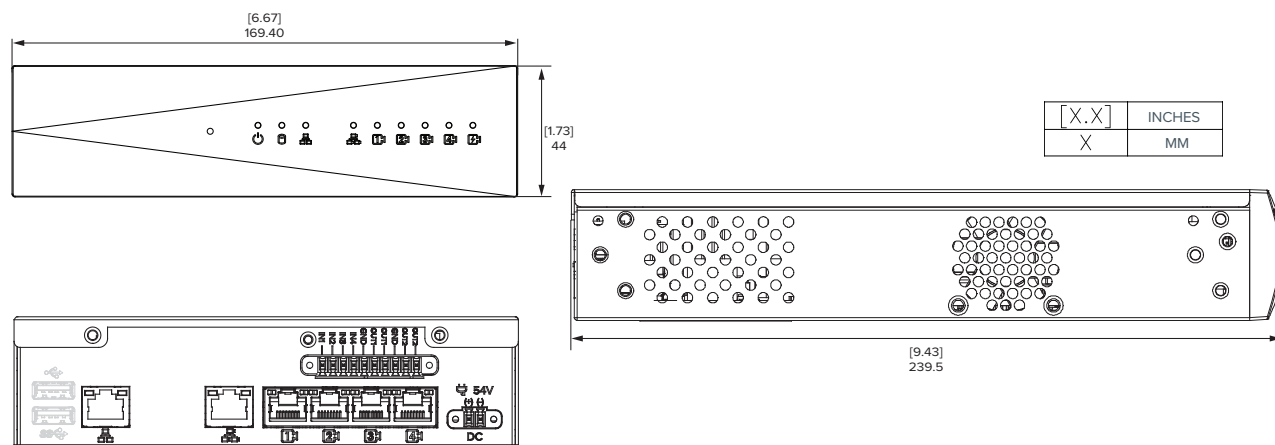

Specifications

SYSTEM	Recording Rate	80 Mbps									
	Stream Out Rate	50 Mbps									
	Camera Channels	4									
	Recording Image Rate	Up to 30 images per second per channel									
	PoE Ports	4 x 10/100 (IEEE 802.3at) — supports PoE+ on a per port basis									
	Total PoE Output	60 W									
	Uplink	2 x 10/100/1000 Mbps RJ-45									
	External I/O Terminals	4 Digital Inputs and 2 Relay Outputs (to be enabled with firmware update)									
MECHANICAL	Dimensions (LxWxH)	239.5 mm x 169.4 mm x 44 mm; 9.43" x 6.67" x 1.73"									
	Weight	3.39 kg (including power supply, mounting bracket and all packaging)									
ELECTRICAL	Power Input	48-54 V, 1.88-1.67 A									
	Power Supply	Single non-redundant									
	Power Consumption	20 W min.; 90 W max.									
ENVIRONMENTAL	Operating Temperature	0°C to 50°C (32°F to 122°F)									
	Storage Temperature	-40° C to 70° C (-40° F to 158° F)									
	Humidity	10 - 90% Relative humidity (non-condensing)									
CERTIFICATIONS	Certifications/Directives	UL	cUL	CE	RoHS	WEEE	RCM	EAC	NOM	KC	
	Safety	UL 60950-1			CSA 60950-1			IEC/EN 60950-1			
	Electromagnetic Emissions	FCC Part 15 Subpart B Class B		IC ICES-003 Class B		EN 55032 Class B	EN 55011	EN 61000-6-3	EN 61000-3-2	EN 61000-3-3	
	Electromagnetic Immunity	EN 55024				EN 61000-6-1					
SUPPORTED ACC FEATURES	System	<ul style="list-style-type: none">4 cameras / deviceSite support for up to 24 servers, 500 cameras and 100 defined users				<ul style="list-style-type: none">5 client connections / device					
	Device Support	<ul style="list-style-type: none">Automatic device discoveryAvigilon HD H.264 cameras & encoders (up to 4)				<ul style="list-style-type: none">Avigilon HD H.264 Pro cameras (up to 2)ONVIF cameras & encoders					
	Client	<ul style="list-style-type: none">Saved ViewsMapsWeb pages				<ul style="list-style-type: none">Editable Site ViewIntelligent Virtual MatrixCollaborative investigations					
	Recording, Searching and Playback	<ul style="list-style-type: none">Hourly configurable recording scheduleLossless recordingIntelligent motion searchLive export				<ul style="list-style-type: none">Thumbnail searchEvent searchAlarm searchMulti-camera export					
	Integrations	All 3rd party integrations via the ACC SDK			Plus:	<ul style="list-style-type: none">CommScope iPatch RS2 AccessIt!			<ul style="list-style-type: none">DDS Amadeus 5 DSX		
	Additional Features	<ul style="list-style-type: none">Email event notificationDigital input email triggerManual digital output triggerAudio recording and talkdown				<ul style="list-style-type: none">Unlimited rule triggersRedundant recordingFailover connectionsAlarm escalation					
	ORDERING INFORMATION	VMA-RPO-4P2	2.0 TB storage, 4 Port ACC ES HD Recorder								
VMA-RPO-4P4		4.0 TB storage, 4 Port ACC ES HD Recorder									
ENC-4P-H264		4-Port H.264 Video Encoder with 4 Audio Inputs and 4 Audio Outputs									
VMA-RPX-4PRMS1U		ES Rack Mount									

VMA-RPO-4Px-NA =



VMA-RPO-4Px-UK =



VMA-RPO-4Px-EU =



VMA-RPO-4Px-AU =

